




SDM-E201T

HDBaseT Transmitter Module

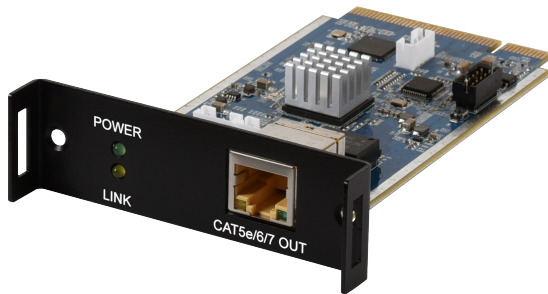

Operation Manual

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from Cypress Technology.

© Copyright 2018 by Cypress Technology.

All Rights Reserved.

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document are trademarks of the companies with which they are associated.



SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply. Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
 - To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
 - Never spill liquid of any kind on or into this product.
 - Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
 - Do not attach the power supply cabling to building surfaces.
 - Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
 - Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
 - To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.
 - Please completely disconnect the power when the unit is not in use to avoid wasting electricity.
-

VERSION HISTORY

REV.	DATE	SUMMARY OF CHANGE
Ver 1.00	2024/4/9	Initial Release





CONTENTS

1. Introduction	1
2. Applications	1
3. Package Contents	1
4. System Requirements	1
5. Features	2
6. Operation Controls and Functions	3
6.1 Front Panel.....	3
6.2 Card Installation.....	4
6.3 Card Removal.....	5
7. Connection Diagram	6
8. Specifications	7
8.1 Technical Specifications	7
8.2 Video Specifications	8
8.3 Audio Specifications	9
8.3.1 Digital Audio	9
8.4 Cable Specifications	10
8.5 HDBaseT Features.....	11
9. Acronyms	12



1. INTRODUCTION

This HDBaseT Module Transmitter is a great solution for extending 4K60 video and audio via a single run of CAT.5e/6/7 cable over distances up to 40 meters. This extender complies with the advanced HDCP 2.2 and HDMI 2.0 standards, as well as supporting the legacy HDCP 1.x and HDMI 1.x standards.

The module's design is compatible with a variety of products that have a standard CYP Module Slot, offering increased flexibility to customers.

2. APPLICATIONS

- Household entertainment sharing and control
- Lecture room display and control
- Showroom display and control
- Meeting room presentation and control
- Classroom display and control

3. PACKAGE CONTENTS

- 1× HDBaseT Module Transmitter
- 2× Mounting Screws (Set of 2)
- 1× Operation Manual

4. SYSTEM REQUIREMENTS

- Must be installed into a product with an available compatible CYP Module Slot

Note: Despite appearances, this card is NOT designed for installation into a PC's PCIe card slot and should only be installed in officially compatible products.

- A compatible HDBaseT Receiver with self-power support is required.
- Industry standard CAT. 5e/6/7 Ethernet cable is required.




5. FEATURES

- Supports distance up to 70m/230ft at 1080p and 40m/131ft at 4K
- Supports output resolutions up to 4K@60Hz (4:2:0, 8-bit)
- Supports HDCP repeater and CEC bypass
- Supports Deep Color input and output up to 12-bit
- Supports pass-through of many audio formats including LPCM (up to 8 channels), Bitstream, and HD Bitstream
- HDMI 2.0 and DVI 1.0 compatible
- HDCP 2.2 and HDCP 1.x compliant

6. OPERATION CONTROLS AND FUNCTIONS

6.1 Front Panel

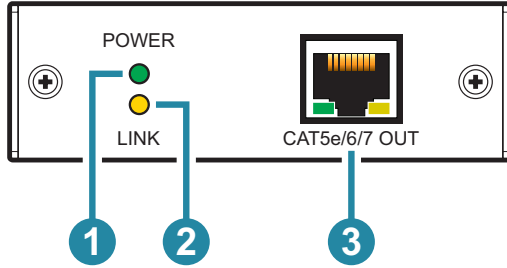


- 1 POWER LED:** This LED will illuminate to indicate the unit is on and receiving power.
- 2 LINK LED:** This LED will illuminate solidly when a live connection with a compatible receiver is active.
- 3 CAT. 5e/6/7 OUT Port:** Connect to a compatible HDBaseT Receiver with a single CAT.5e/6/6A/7 cable for transmission of all data signals.

6.2 Card Installation


- To install this module card into your unit, it must have at least one available CYP Module Slot.
- Ensure that the anti-static procedure is completed before handling the module card.

(1) Prior to the installation, power off the unit completely.




(2) Remove the dummy faceplate that is covering the card module slot by unscrewing both screws.

Note: Be sure to store the dummy faceplate and its screws in somewhere safe, in case you need to use them again later.




(3) Align the card with the guiderails to each side of the module slot, gently slide the module card into the slot until its faceplate is flush with the back of the unit.




- (4) Secure the module card to the unit by using the supplied screws.
- (5) The unit may now be powered on. The card's power LED will light up to indicate while it's receiving power. In most cases, the card will be automatically detected by the unit and be available to use.

6.3 Card Removal


(1) Prior to removal, power off the unit completely.



(2) Completely unscrew both screws.




(3) Gently pull the card straight out of the module slot using the provided handles.



(4) Cover the module slot with a dummy faceplate and tighten both screws.

(5) The unit may now be powered back on.

7. CONNECTION DIAGRAM

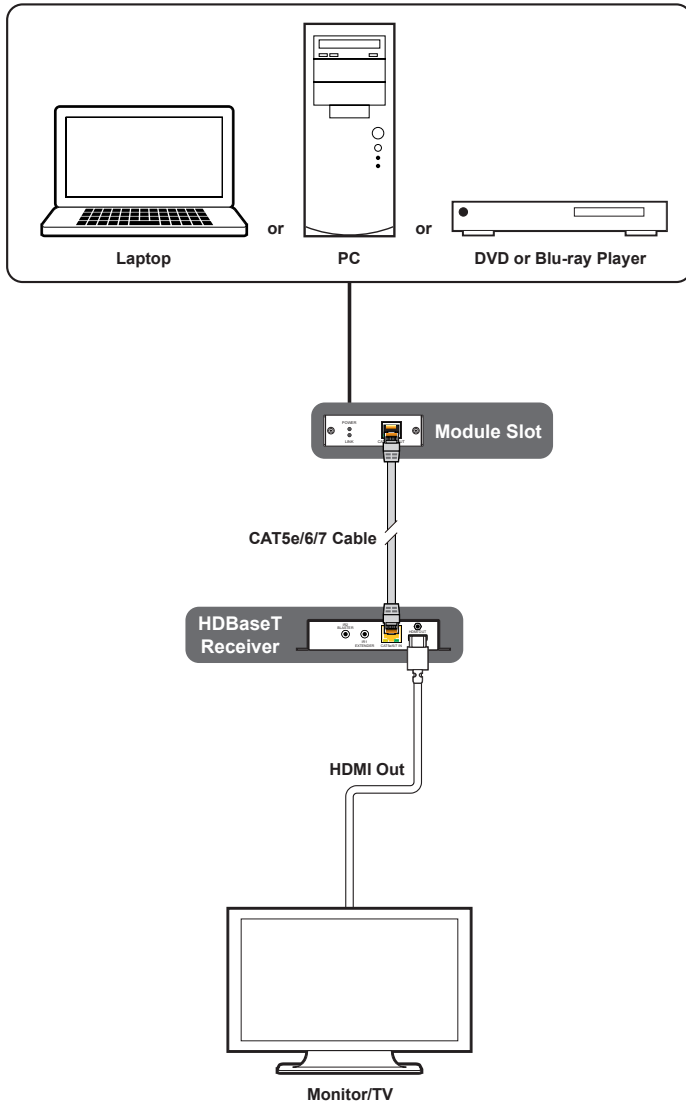

8. SPECIFICATIONS

8.1 Technical Specifications

HDBaseT Bandwidth	10.2Gbps
Card Slot Format	1× CYP Module (Edge Connector)
Output Ports	1× HDBaseT (RJ-45)
ESD Protection (HBM)	±8kV (Air Discharge) ±4kV (Contact Discharge)
Dimensions (W×H×D)	122.2mm×25mm×82mm [Case Only] 122.2mm×25mm×82mm [All Inclusive]
Weight	60g
Chassis Material	Metal (Steel)
Chassis Color	Black
Operating Temperature	0°C – 40°C/32°F – 104°F
Storage Temperature	-20°C – 60°C/-4°F – 140°F
Relative Humidity	20 – 90% RH (Non-condensing)

8.2 Video Specifications

Supported Resolutions (Hz)	Input	Output
	HDBaseT	Card Slot
720×400p@70/85	✓	✓
640×480p@60/72/75/85	✓	✓
720×480i@60	✓	✓
720×480p@60	✓	✓
720×576i@50	✓	✓
720×576p@50	✓	✓
800×600p@56/60/72/75/85	✓	✓
848×480p@60	✓	✓
1024×768p@60/70/75/85	✓	✓
1152×864p@75	✓	✓
1280×720p@50/60	✓	✓
1280×768p@60/75/85	60/75	60/75
1280×800p@60/75/85	60/60(RB)	60/60(RB)
1280×960p@60/85	✓	✓
1280×1024p@60/75/85	✓	✓
1360×768p@60	✓	✓
1366×768p@60	✓	✓
1400×1050p@60	✓	✓
1440×900p@60/75	✓	✓
1600×900p@60RB	✓	✓
1600×1200p@60	✓	✓
1680×1050p@60	✓	✓
1920×1080i@50/60	✓	✓
1920×1080p@24/25/30	✓	✓

Supported Resolutions (Hz)	Input	Output
	HDBaseT	Card Slot
1920×1080p@50/60	✓	✓
1920×1200p@60RB	✓	✓
2560×1440p@60RB	×	×
2560×1600p@60RB	✓	✓
2048×1080p@24/25/30	✓	✓
2048×1080p@50/60	✓	✓
3840×2160p@24/25/30	✓	✓
3840×2160p@50/60 (4:2:0)	✓	✓
3840×2160p@24, HDR10	×	×
3840×2160p@50/60 (4:2:0),HDR10	×	×
3840×2160p@50/60	✓	×
4096×2160p@24/25/30	✓	✓
4096×2160p@50/60 (4:2:0)	✓	✓
4096×2160p@24, HDR10	×	×
4096×2160p@50/60 (4:2:0),HDR10	×	×
4096×2160p@50/60	✓	×

8.3 Audio Specifications

8.3.1 Digital Audio

Card Slot Input / HDBaseT Output	
LPCM	
Max Channels	8 Channels
Sampling Rate (kHz)	32, 44.1, 48, 88.2, 96, 176.4, 192
Bitstream	
Supported Formats	Standard & High-Definition

8.4 Cable Specifications

Cable Length	HD	FHD	4K UHD	4K UHD ⁺	8K UHD
Ethernet Cable					
Cat.5e/6	60m	35m		×	
Cat.6A/7	70m	40m		×	

Bandwidth Category Examples:

- **HD Video**
 - 720p@60Hz
 - HDMI transmission rates lower than 3Gbps
 - HD-SDI (SMPTE 292M, 1.485Gbps)
- **FHD Video**
 - 1080p@60Hz
 - HDMI transmission rates between 3Gbps and 5.3Gbps
 - 3G-SDI (SMPTE 424M, 2.970Gbps)
- **4K UHD Video**
 - 4K@24/25/30Hz (8-bit color) & 4K@50/60Hz (4:2:0, 8-bit color)
 - HDMI transmission rates between 5.3Gbps and 10.2Gbps
 - 6G-SDI (SMPTE ST 2081, 6Gbps)
- **4K UHD⁺ Video**
 - 1080p@120Hz (10/12-bit HDR)
 - 4K@50/60Hz (4:4:4, 8-bit) & 4K@50/60Hz (4:2:0, 10/12-bit HDR)
 - HDMI transmission rates between 10.2Gbps and 18Gbps
 - 12G-SDI (SMPTE ST 2082, 12Gbps)
- **8K UHD Video**
 - 4K@120Hz (10/12-bit HDR)
 - 8K@24/25/30Hz (10/12-bit HDR) & 8K@50/60Hz (4:2:0, 8-bit color)
 - HDMI transmission rates between 18Gbps and 48Gbps
 - 24G-SDI (SMPTE ST 2083, 24Gbps)

8.5 HDBaseT Features

HDBaseT Feature Set	Receiver
Video & Audio Extension	Supported
LAN Extension	Unsupported
Send power to Receiver	Unsupported
Accept power from Receiver	Unsupported
IR Extension	Unsupported
RS-232 Extension	Unsupported
USB 2.0 Extension	Unsupported

9. ACRONYMS

ACRONYM	COMPLETE TERM
4K UHD	4K Ultra-High-Definition (10.2Gbps max)
ADC	Analog-to-Digital Converter
ARC	Audio Return Channel
ASCII	American Standard Code for Information Interchange
AV	Audio/Video
AVR	Audio/Video Receiver or Recorder
Cat.5e	Enhanced Category 5 cable
Cat.6	Category 6 cable
Cat.6A	Augmented Category 6 cable
Cat.7	Category 7 cable
CEC	Consumer Electronics Control
CLI	Command-Line Interface
COM	Communication
DHCP	Dynamic Host Configuration Protocol
eARC	Enhanced Audio Return Channel
EDID	Extended Display Identification Data
GbE	Gigabit Ethernet
Gbps	Gigabits per second
GUI	Graphical User Interface
HD	High-Definition
HDBT	HDBaseT
HDCP	High-bandwidth Digital Content Protection
HDMI	High-Definition Multimedia Interface
HDR	High Dynamic Range
HDTV	High-Definition Television
HPD	Hot Plug Detection

ACRONYM	COMPLETE TERM
IP	Internet Protocol
IR	Infrared
kHz	Kilohertz
LAN	Local Area Network
LED	Light-Emitting Diode
LPCM	Linear Pulse-Code Modulation
MAC	Media Access Control
MHz	Megahertz
OAR	Optical Audio Return
OSD	On-Screen Display
PD	Powered Device
PoC	Power over Cable
PoH	Power over HDBaseT
PoE	Power over Ethernet
PSE	Power Sourcing Equipment
SDTV	Standard-Definition Television
SDVoE	Software Defined Video over Ethernet
SNR	Signal-to-Noise Ratio
TCP	Transmission Control Protocol
THD+N	Total Harmonic Distortion plus Noise
TMDs	Transition-Minimized Differential Signaling
UHDTV	Ultra-High-Definition Television
USB	Universal Serial Bus
WUXGA (RB)	Widescreen Ultra Extended Graphics Array (Reduced Blanking)
XGA	Extended Graphics Array
Ω	Ohm



CYPRESS TECHNOLOGY CO., LTD.
www.cypress.com.tw
